

Carflex 200

Exhaust gas hose for exhaust fumes/gases up to +200°C

Material

- 1 clamp profile spiral: hot-dip galvanised steel band with additional plastic outer scuff-protection profile
- 2 wall: neoprene-coated polyester fabric

Applications



- suction of engine exhaust fumes up to max.+200 °C acc. to exhaust guidelines and sufficient fresh air intake (approx. 50%)
- all conventional exhaust systems, such as: - Exhaust Hose Reel - Suction Rail System - Upper/Lower Floor Systems - Stationary Systems
- light to medium wear during extraction of petrol and diesel engine fumes from passenger vehicles

Properties

- good flow characteristics
- extremely compressible to approx. 1:5
- vibration-proof
- high tension-proof connection of wall-lining and spiral via special clamp mechanism
- highly flexible
- smallest bending radius
- extremely lightweight

Temperature Range

- +200°C with appropriate use of exhaust regulators and sufficient air supply (approx. 50%)

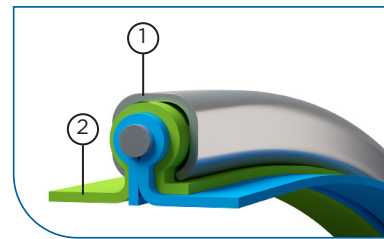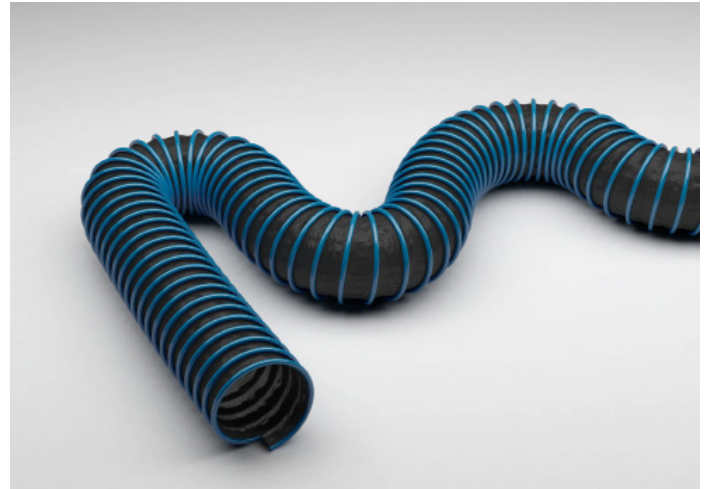

DN	vacuum	bend radius	outer Ø	weight/m	old article no.	new article no.	standard length	max. production length
	bar	mm	mm	kg			m	m
63	0.23	38	76	0.55	240-063-x	000334-063-x	10	25
75	0.18	46	89	0.6	240-075-x	000334-075-x	10	25
80	0.15	48	93	0.63	240-080-x	000334-080-x	10	25
100	0.1	60	117	0.79	240-100-x	000334-100-x	10	25
125	0.06	75	142	0.95	240-125-x	000334-125-x	10	25
150	0.04	90	167	1.47	240-150-x	000334-150-x	10	25
200	0.03	120	217	1.76	240-200-x	000334-200-x	10	25

All data refers to a medium and ambient temperature of +20 °C.
 * Available on request.
 Subject to technical changes and colour deviations.



Hose Reducer, symmetrical



Clip-Grip quick action clamp



Clip-Grip Hose clamp, screwable



Hose Connector