

Streetmaster L-F

PU suction hose for streetcleaning machines. Abrasion, vacuum & microbe resistant

Material

- 1 spiral: encapsulated PVC spring steel wire
- 2 wall: polyester polyurethane, microbe resistant
- 3 wall thickness between spirals approx. 0.7 mm

Applications



- Suction and wander hose for street cleaning machines and precinct sweeping machines
- Leaf collecting
- Grass cutting machines

Properties

- microbe resistant
- extremely abrasion resistant
- UV and Ozone resistant
- highly flexible
- compressibility approx 3:1
- lightweight

Temperature Range

- -40°C to +130°C

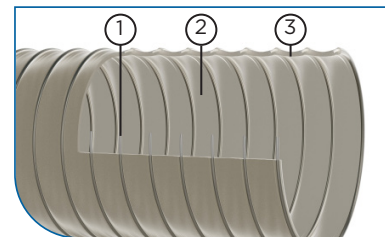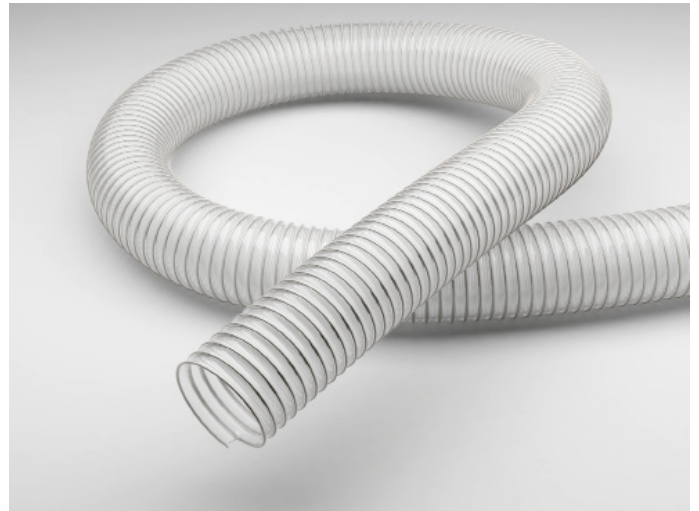

DN	op. pressure	vacuum	bend radius	outer Ø	weight/m	old article no.	new article no.	standard length	max. production length
mm	bar	bar	mm	mm	kg			m	m
100*	0.5	0.1	75	112	0.7	313-100-x	007574-100-x	10	15
125*	0.4	0.1	90	135	1	313-125-x	007574-125-x	10	15
150*	0.35	0.07	100	160	1.2	313-150-x	007574-150-x	10	15
160*	0.35	0.07	105	170	1.4	313-160-x	007574-160-x	10	15
180*	0.3	0.07	120	192	1.5	313-180-x	007574-180-x	10	15
200*	0.25	0.07	125	212	1.6	313-200-x	007574-200-x	10	15
225*	0.25	0.07	150	240	1.8	313-225-x	007574-225-x	10	15
250*	0.22	0.06	200	265	1.9	313-250-x	007574-250-x	10	15
300*	0.2	0.06	250	315	3	313-300-x	007574-300-x	10	15

All data refers to a medium and ambient temperature of +20 °C.

* Available on request

Subject to technical changes and colour deviations.



Clip-Grip Hose Clamp, screwable



Clip-Grip Quick-Fix Clamp



Hose Connector



Hose Reducer, symmetrical